





IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Case Docket No. JPP-1231

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

"Express Mail" mailing label number EE905765328US  
Date of deposit May 13, 1999  
I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.  
Ann M. Knab  
(Typed or printer name of person mailing paper or fee)  
  
(Signature of person mailing paper or fee)



Sir:

Transmitted herewith for filing is the patent application of :

INVENTOR(S): Martin A. Freilich, Jacqueline P. Duncan, A. Jon Goldberg, Charles J. Burstone

FOR: IMPLANT SYSTEM

Enclosed are:

☒ 18 pages of specification, including claims and abstract.

☐ 9 sheet(s) of drawing(s).

☐ Declaration and Power of Attorney.

☐ Information Disclosure Statement.

☐ An associate power of attorney.

☐ An assignment of the invention.

☐ A certified copy of a \_\_\_\_\_ application.

☒ A verified statement to establish small entity under 37 CFR 1.9 and 37 CFR 1.27.

The filing fee has been calculated as shown below:

			SMALL ENTITY		LARGE ENTITY	
FOR:	# FILED	# EXTRA	RATE	FEE	RATE	FEE
BASIC FEE	////////	////////	\$380	\$380	\$760	
TOTAL CLAIMS (20)	48	28	X 9	\$252	x 18	
INDEP. CLAIMS (3)	14	11	x 39	\$429	x 78	
MULTIPLE DEPENDENT CLAIMS	0	0	+130	\$ 0	+260	
			TOTAL	\$1,061	TOTAL	

[ X ] Please charge my Deposit Account No. 50-0718 in the amount of \$1,061.00. A duplicate copy of this sheet is enclosed.

[ ] A check in the amount of \$\_\_\_\_\_ is enclosed to cover the filing fee.

[ X ] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-0718. A duplicate of this sheet is attached.


[ X ] Any additional filing fees required under 37 CFR 1.16.

[ X ] Any patent application processing fees under 37 CFR 1.17.

Please file this application and conduct all future correspondence with Applicants' attorney identified below.

Respectfully Submitted,

Ann M. Knab  
Applicants' Attorneys

By:   
Ann M. Knab  
Registration No. 33,331


Date: May 13, 1998

Address: 53 North Plains Industrial Road, Wallingford, CT 06492  
Telephone: (203) 265-7397 ext. 508

PTO/SB/10 (12-97)

Approved for use through 9/30/00. OMB 0651-0031  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>STATEMENT CLAIMING SMALL ENTITY STATUS</b> <b>(37 CFR 1.9(f) &amp; 1.27(c))--SMALL BUSINESS CONCERN</b>	Docket Number (Optional) <u>JPP-1231</u>
Applicant, Patentee, or Identifier: <u>Martin A. Freilich, Jacqueline P. Duncan,</u> <u>A. Jon Goldberg, Charles J. Burstone</u> Application or Patent No.: _____ Filed or Issued: _____ Title: <u>IMPLANT SYSTEM</u>	
I hereby state that I am <input type="checkbox"/> the owner of the small business concern identified below. <input checked="" type="checkbox"/> an official of the small business concern empowered to act on behalf of the concern identified below.	
NAME OF SMALL BUSINESS CONCERN <u>Jeneric/Pentron Incorporated</u>	
ADDRESS OF SMALL BUSINESS CONCERN <u>53 North Plains Industrial Road</u> <u>Wallingford, Connecticut 06492</u>	
<p>I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.</p> <p>I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:</p> <p><input checked="" type="checkbox"/> the specification filed herewith with title as listed above.  <input type="checkbox"/> the application identified above.  <input type="checkbox"/> the patent identified above.</p> <p>If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).</p> <p>Each person, concern, or organization having any rights in the invention is listed below:  <input type="checkbox"/> no such person, concern, or organization exists.  <input type="checkbox"/> each such person, concern, or organization is listed below.</p> <p>Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)</p> <p>I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))</p>	
NAME OF PERSON SIGNING <u>Ann M. Knab</u>	
TITLE OF PERSON IF OTHER THAN OWNER <u>Assistant General Counsel</u>	
ADDRESS OF PERSON SIGNING <u>53 North Plains Industrial Road</u> <u>Wallingford, Connecticut 06492</u>	
SIGNATURE <u></u>	DATE <u>5/13/99</u>

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

## IMPLANT SYSTEM

### Technical Field

The present invention relates generally to implant systems and more specifically to implant systems having fiber-reinforced composite components.

### Background of the Invention

Dental implants are routinely used to replace missing teeth in both the maxilla and mandible jawbones. These implants are restored with crowns and/or bridges. The choice and design depend upon the number of teeth missing and the location of the implants. The single crown typically consists of a metal framework veneered with porcelain. Smaller bridges are also made from metal and porcelain while the larger prostheses consist of a metal framework or substructure and an acrylic resin denture tooth superstructure. For crowns and all bridges, the metal framework incorporates machined gold alloy components called cylinders. The cylinders allow the metal framework to be connected to the abutments which are in turn connected to the implants. The periodontal ligament is a soft tissue membrane located in the mouth between tooth and bone and absorbs energy during the chewing process. Dental implants are fused to bone and, as noted above, are typically fabricated of a metal superstructure which lacks resilience characteristic of the periodontal ligament. This results in higher stresses to implants and the dental prosthesis. Further, the metal framework is cast and does not typically fit onto the abutments well. Thus, it must often be cut and refitted and the pieces are then soldered together. The process is time consuming and the materials used to fabricate the framework and abutments (e.g., gold) can be expensive. Additionally, it may be difficult to completely cover the metal framework which results in a less aesthetic appearance.

Carbon/graphite reinforced autopolymerizing poly(methyl methacrylate) bridges and frameworks were attempted heretofore but were found insufficient due to the procedures and designs used to fabricate the bridges and frameworks. Retention of the materials was found inadequate and fractures were found to occur in the final prosthesis. Bergendal et al., 1995 Clin Oral Imp Res, reported limited success in a clinical trial using carbon/graphite fiber reinforced PMMA for the fabrication of a framework in an implant

system. Fractures occurred in the framework adjacent the end abutment propagating through the acrylic resin and carbon/graphite fibers to the gold and/or titanium cylinders. The cylinders were not designed to provide adequate retention of the framework materials. Additionally, fracture sites in connection with cylinders showed incomplete wetting of the fibers with polymer.

It is desirable to provide an implant system which is able to provide adequate retention of fiber reinforced composite material and to reduce and/or prevent fracture of the prostheses made therefrom. It is advantageous to provide an implant system having good esthetics and adaptability.

#### Summary of the Invention

These and other objects and advantages are accomplished by the implant system herein. The system may include implants, abutments, cylinders and a structural framework with a veneer thereon. A prosthesis comprises the structural framework and veneer.

In accordance with one embodiment herein, cylinders are provided with grooves or shelves thereon to retain a structural framework thereon. The structural framework may comprise fiber reinforced composite material which is disposed on and around the cylinders to provide the framework for a prosthesis.

In accordance with another embodiment herein, abutments are provided for single or small implant systems wherein the abutments comprise mechanical retentive features such as grooves, holes, nodules or beads on the surface for retaining polymeric material thereon.

The implant system herein provides an aesthetic and adaptable system having adequate retention of fiber reinforced composite material and good fracture toughness.

#### Brief Description of the Drawings

Features of the present invention are disclosed in the accompanying drawings, wherein similar reference characters denote similar elements throughout the several views, and wherein:

FIG. 1 is a perspective view of a cylinder of an implant system of the invention;

FIG. 2 is a perspective view of the cylinder of FIG. 1 showing a proximal surface thereof;

FIG. 3 is a top plan view of cylinders of the invention having screws therein;

FIG. 4 is a perspective view of a series of cylinders attached to corresponding abutment analogs;

FIG. 5 is a top plan view of cylinders showing variations in the locations of grooves thereon;

FIG. 6 is a perspective view of a terminal cylinder of the implant system;

FIG. 7 is a side view of FIG. 6;

FIG. 8 is a perspective view showing the cylinders of FIG. 4 having a framework thereon;

FIG. 9 is a top plan view of the framework and cylinders of FIG. 8;

FIG. 10 is a perspective view of the framework of FIGS. 8 and 9 partially complete;

FIG. 11 is a bottom view of a finished prosthesis;

FIG. 12 is a perspective view of the prosthesis of FIG. 11;

FIG. 13 is a top perspective view of the prosthesis in FIG. 11 showing bores or screw holes therein;

FIG. 14 is a perspective view of alternate embodiment of an implant system of the invention; and

FIG. 15 is a perspective view of an alternate embodiment of the implant system of the invention.

#### Detailed Description of the Invention

The implant system of the invention may comprise implants, abutments, cylinders and a framework to support the implant crown or superstructure of the prosthesis. The implant system may be a single implant crown, a small prosthesis for replacing one or a few teeth or a large prosthesis for replacing all or a large number of teeth. Implants are implanted into the patient's jawbone. The abutments typically act as connectors between the implants and the cylinders which include a framework and upon completion, a prosthesis. Cylinders fit onto the abutments and are connected or attached thereto by

known means, preferably by a screw or like component or by a luting material known in the industry such as Lute-It® composite, available from Jeneric/Pentron Inc., Wallingford, CT. Attention is directed to FIGS. 1 and 2 which depict a cylinder 10. In FIG. 1, cylinder 10 is positioned on an abutment analog 12 on a stone cast 13 (in FIG. 4) which is similar to an actual abutment which is eventually connected to the implant in the mouth.

Cylinder 10 is designed to orient and retain a structural framework material, or a composite or ceramic material thereon for single crowns and small prostheses.

Preferably, the structural framework material is a fiber reinforced composite material.

Retaining grooves or shelves may be disposed anywhere on cylinders 10 to retain and

hold the structural framework or other material thereon. Preferably, the grooves or shelves are disposed vertically, as depicted in Figures 1 and 2 at 14, and are preferably located on the proximal surfaces of cylinders 10. These retaining grooves allow

appropriate positioning of the fiber reinforced composite framework between cylinders and mechanically retain the framework in place. Alternatively, or in addition to grooves

14, horizontal grooves or shelves 16 may be provided on cylinders 10 and are preferably located on the facial and lingual surfaces of the cylinders and assist in controlling the fiber reinforced composite while it is wrapped around the cylinders to complete the

framework. Additionally, nodules, beads or holes may be disposed on the surface of the cylinders to aid in the retention of polymeric material. Preferably, the nodules and the

like are of a size smaller than the shelves or grooves and can also be located on the entire surface of the cylinders including the shelves and grooves or on a portion of the surface

of the cylinders. FIG. 3 shows cylinders 10 with bores or screw holes 18 extending

axially through cylinders 10. Screws 20 are shown inserted in screw holes 18 and extend through to abutment analogs 12 shown in FIG. 4. Screws 20 connect and retain cylinders

10 to abutment analogs 12 on cast 13 or eventually to abutments in the mouth.

Cylinders 10 may be fabricated of any known material such as metal, plastic, ceramic, polymeric material and mixtures thereof. Vertical grooves 14 may be located at a variety of different angles depending on where the cylinders are positioned within the framework. FIG. 5 shows a top plan view of three different positions of grooves 14.

FIG. 5A shows grooves 14 disposed directly across from one another at the 3 and 9 o'clock positions. FIG. 5B shows grooves 14 located slightly upward with respect to the

position of grooves 14 in FIG. 5A between the 2 and 3 o'clock positions and between the 9 and 10 o'clock positions. FIG. 3 shows grooves 14 located at the 2 and 10 o'clock positions.

FIGS. 6 and 7 show a terminal cylinder 21 having a cantilever support 22 located on one side of cylinder 21. The support 22 provides reinforcement to the ends 23 of the framework 26 shown in FIGS. 8 and 9. Cylinder 10 as well as cylinder 21 may include beads, nodules, holes or the like to aid in the retention of polymeric material thereon. FIGS. 6 and 7 show nodules 25 on support 22 and grooves 16.

FIGS. 8 and 9 show fiber reinforced composite material 24 deposited between, on and around cylinders 10 to form a framework 26. Grooves 14 and 16 assist in retaining fiber reinforced composite material 24 on cylinders 10. Retaining grooves 14 and 16 allow appropriate positioning of fiber reinforced composite framework 26 between and around cylinders 10 and mechanically hold framework 26 in place. Fiber reinforced material 24 may be in the form of strips, ribbon or like form for fabrication of framework 26. Preferably, fiber reinforced material 24 is in the form of bars or rods 28 as shown in FIG. 10 which may be placed into grooves 14 between cylinders 10 and on cantilever supports 22 on terminal or end cylinders 21. Rods 28 may be partially or fully cured prior to placement in grooves 14. Thereafter, uncured or partially cured fiber reinforced composite material 24 is preferably wrapped around the cylinders fitting within grooves 16 for retention and cured to form framework 26. A prosthesis is then fabricated on the fiber reinforced composite framework. Preferably, a material which mimics the pink connective tissue in the mouth is used to cover framework 26 and provide the base or lower portion of the prosthesis. Denture base materials such as poly(methyl methacrylate), resin composites such as Sculpture® composite available from Jeneric/Pentron Inc, Wallingford, CT and similar materials can be used to form the base of the prosthesis. FIG. 11 shows a base 29 of denture base material which is applied over framework 26 to form the understructure of the prosthesis. Teeth are placed or fabricated on the occlusal surface of the prosthesis as shown at 32 in FIGS. 12 and 13.

FIGS. 12 and 13 show prosthesis 30 with teeth 32. FIG. 13 shows bores 34 which extend through prosthesis 30 and receive retaining members such as screws or the like for retention of prosthesis 30 into the patient's mouth. The prosthesis is placed in the



patient's mouth and screws or the like are inserted into bore 34 and through to and into abutments which are connected to implants located in the patient's jawbone.

In accordance with the method of manufacture of the implant assembly herein, a series of cylinders are placed on analog abutments 12 as shown in FIG.4. A structural framework is built on the series of cylinders using a fiber-reinforced composite or like material. Preferably, fiber reinforced composite rods or bars are prefabricated and placed between the proximal shelves 14. Thereafter, fiber reinforced composite material may be wrapped around the series of cylinders and retained in facial and lingual grooves 16.

Preferably, the fiber reinforced composite material is uncured or only partially cured and is wrapped around the cylinders a plurality of times to provide integrity to the framework. A bonding material such as FibreKor® Special Resin or Flow-It® resin, both available from Jeneric/Pentron Inc., Wallingford, CT may be applied between layers of the fiber reinforced composite material to aid in retention and adherence thereof. The layers may be cured before the application of additional layers or may be cured after completion of the framework. A denture base material may be applied over the framework and teeth may be fabricated on the base. The prosthesis may be placed in the patient's mouth and connected to the abutments and/or implants which have been previously inserted into the patient's mouth weeks or months before.

As set forth above, the implant system herein may be used for single crowns, small prostheses comprising one or a few teeth, or large or full arch prostheses comprising all or many teeth. The single implant crown system preferably includes an abutment or substructure bonded to a polymeric veneer material and a crown. The abutment or substructure preferably fits within the implant component which is implanted into the bone. The abutment or substructure may be fabricated of any known material such as metal, plastic, ceramic, polymeric material and mixtures thereof. FIG. 14 shows abutment 40 which fits in an implant 42. Abutment 40 includes a longitudinally extending lower end 44 which fits in implant 42 and collar 46 which may partially or fully fit within implant 42. Lower end 44 may be cemented and/or screwed into implant 42. Preferably, lower end 44 is threaded and can be screwed into implant 44. Abutment 40 also includes a longitudinally extending upper end 48 for placement of a crown thereon. Upper end 48 may include one or more holes 50 which assist in retaining a

polymeric material 52. Holes 50 may be substituted with beads, nodules or the like for retaining a polymeric material. A crown or bridge retainer 54 may further be disposed on polymeric material 52. Polymeric material 52 may include any of the dental veneering materials in the art such as Sculpture® composite available from Jeneric/Pentron Inc.,  
 5 Wallingford, CT, ArtGlass™ composite available from Heraeus Kulzer Inc., South Bend, Indiana, and BelleGlass™ composite from Kerr, Orange, CA.

FIG. 15 shows an alternative embodiment herein comprising an abutment or substructure 60 which fits into an implant. Abutment or substructure 60 may be comprised of metal, ceramic, plastic, polymeric or like material having sufficient strength  
 10 to withstand the forces occurring in the mouth. Substructure 60 may comprise retentive beads 62 thereon to assist in the retention of a polymeric material. Beads 62 may be replaced with holes, nodules or the like for retaining polymeric material thereon. A screw 64 is inserted in opening or chimney 66 of substructure 60 to retain substructure 60 in an implant which has been placed in the mouth. Preferably lower section or collar 60L  
 15 fits over an implant and upper section 60U is visible above the gingiva. Collar 60L may vary in height depending upon the size or depth of the opening in which it is inserted. Polymeric material such as Fibrekor® fiber reinforced composite and/or Sculpture® composite available from Jeneric/Pentron Inc., Wallingford, CT may be applied on upper section 60U indirectly outside the mouth to provide a prosthesis.

20 Fiber reinforced composite material 24 comprises a polymeric matrix and reinforcing fibers within the matrix. The fibers are embedded in the matrix manually or mechanically by a variety of techniques including, but not limited to matched die processes, autoclave molding, resin injection molding (RIM), sheet, dough and bulk molding, press molding, injection molding, reaction injection molding, resin transfer  
 25 molding (RTM), compression molding, open molding, extrusion, pultrusion and filament winding. U.S. Patent Nos. 4,717,341 and 4,894,012 to Goldberg et al. show methods of impregnation and are hereby incorporated by reference. Commercially available Fibrekor® fiber reinforced composite from Jeneric/Pentron Inc., Wallingford, CT may be used to build the fiber reinforced composite framework.

30 The polymeric matrix element of the composite is selected from those known in the art of dental materials, such as thermoset and thermoplastic materials, including but

not being limited to polyamides, polyesters, polyolefins, polyimides, polyarylates, polyurethanes, vinyl esters or epoxy-based materials. Other polymeric matrices include styrenes, styrene acrylonitriles, ABS polymers, polysulfones, polyacetals, polycarbonates, polyphenylene sulfides, and the like.

5 Preferred polymeric materials in the fiber reinforced composite include those based on acrylic and methacrylic monomers, for example those disclosed in U.S. Patent Nos. 3,066,112, 3,179,623, and 3,194,784 to Bowen; U.S. Patent Nos. 3,751,399 and 3,926,906 to Lee et al.; commonly assigned U.S. Patent Nos. 5,276,068 and 5,444,104 to Waknine; and commonly assigned U.S. Patent No. 5,684,103 to Jia et al., the pertinent  
10 portions of all which are herein incorporated by reference. An especially preferred methacrylate monomer is the condensation product of bisphenol A and glycidyl methacrylate, 2,2'-bis[4-(3-methacryloxy-2-hydroxy propoxy)-phenyl]-propane (hereinafter abbreviated "BIS-GMA"). Polyurethane dimethacrylates (hereinafter abbreviated "PUDMA"), triethylene glycol dimethacrylate (hereinafter abbreviated  
15 "TEGDMA"), polyethylene glycol dimethacrylate (hereinafter abbreviated "PEGDMA"), urethane dimethacrylate (hereinafter abbreviated "UDMA"), hexane diol dimethacrylate (hereinafter abbreviated "1,6 HDDMA") and polycarbonate dimethacrylate (hereinafter abbreviated "PCDMA") are also commonly-used principal polymers suitable for use in the present invention.

20 The polymeric matrix in the fiber reinforced composite typically includes polymerization initiators, polymerization accelerators, ultraviolet light absorbers, anti-oxidants, and other additives well known in the art. The polymeric matrices may be visible light curable, self-curing, dual curing, and vacuum, heat, and pressure curable compositions as well as any combination thereof. The visible light curable compositions  
25 include the usual polymerization initiators, polymerization accelerators, ultraviolet absorbers, fluorescent whitening agents, and the like. Preferred light curing initiators include camphorquinone (CQ) and trimethyl benzoyl phosphine oxide (TPO). The heat curable compositions, which are generally filled compositions, include, in addition to the monomeric components, a heat cure initiator such as benzoyl peroxide, 1,1'-  
30 azobis(cyclohexanecarbo-nitrile), or other free radical initiators. The preferred polymeric matrix is a curable matrix, wherein light cure effects partial cure of the matrix, and final

curing is by heat under controlled atmosphere. Radiopaque agents may be included in the matrix

The polymeric matrix in the fiber reinforced composite may further comprise at least one filler known in the art and used in dental restorative materials, the amount of such filler being determined by the specific use of the fiber-reinforced composite. Generally, the filler is added in an amount of up to about seventy percent by weight of the composite and preferably in an amount of up to about thirty percent by weight of the composite. Suitable fillers are those capable of being covalently bonded to the polymeric matrix itself or to a coupling agent that is covalently bonded to both. Examples of suitable filling materials include but are not limited to those known in the art such as silica, silicate glass, quartz, barium silicate, barium sulfate, barium molybdate, barium methacrylate, barium yttrium alkoxy ( $\text{Ba}_2\text{Y}(\text{OR})_x$ ), strontium silicate, barium borosilicate, strontium borosilicate, borosilicate, lithium silicate, amorphous silica, ammoniated or deammoniated calcium phosphate and alumina, zirconia, tin oxide, tantalum oxide, niobium oxide, and titania. Particularly suitable fillers for dental filling-type materials prepared in accordance with this invention are those having a particle size ranging from about 0.1-5.0 microns with a silicate colloid of 0.001 to about 0.07 microns and prepared by a series of milling steps comprising wet milling in an aqueous medium, surface etch milling and silanizing milling in a silane solution. Some of the aforementioned inorganic filling materials are disclosed in U.S. Pat. Nos. 4,544,359 and No. 4,547,531 to Waknine, the pertinent portions of which are incorporated herein by reference. Suitable organic filler materials are known in the art, including for example the poly(methacrylate) fillers described in U.S. Patent No. 3,715,331 to Molnar. A mixture of organic and inorganic filler materials may also be used.

The reinforcing fiber element of the composite preferably comprises glass, carbon, graphite, polyaramid, polyethylene, or other fibers known in the art, such as polyesters, polyamides, and other natural and synthetic materials compatible with the polymeric matrix. Some of the aforementioned fibrous materials and fillers materials are disclosed in U.S. Patent Nos. 4,717,341 and 4,894,012 both of which are incorporated herein by reference. The fibers may further be treated, for example, chemically or mechanically etched, silanized, or otherwise treated such as by grafting functional

monomers to obtain proper coupling between the fibers and the resin matrix. Silanization renders the fibers hydrophobic, reducing the water sorption and improving the hydrolytic stability of the composite material, renders the fibers organophilic, improving wetting and mixing, and bonds the fibers to the polymeric matrix. Typical silane is A-174 (p-methacrylate propyl tri-methoxy silane), produced by OSI Specialties, NY.

The fibers preferably take the form of long, continuous filaments, although the filaments may be as short as 0.1 to 4 millimeters. Shorter fibers of uniform or random length might also be employed. Preferably, the fibers are at least partially aligned and oriented along the longitudinal dimensions of the strip. However, depending on the end use of the composite material, the fibers may also be otherwise oriented, including being normal or perpendicular to that dimension. The fibrous element may optionally take the form of a fabric. Fabric may be of the woven or non-woven type and is preferably preimpregnated with a polymeric material as set forth above. The fibrous component may be present in the fiber reinforced composite material in the range from about 20% to about 85% of the composite, and more preferably between about 30% to about 65% by weight.

The implant system may be sold in kit form in a variety of combinations including but not limited to cylinders, implants, composite material, abutments, screws, resin, superstructures and other materials necessary to fabricate implants.

While various descriptions of the present invention are described above, it should be understood that the various features can be used singly or in any combination thereof. Therefore, this invention is not to be limited to only the specifically preferred embodiments depicted herein.

Further, it should be understood that variations and modifications within the spirit and scope of the invention may occur to those skilled in the art to which the invention pertains. Accordingly, all expedient modifications readily attainable by one versed in the art from the disclosure set forth herein that are within the scope and spirit of the present invention are to be included as further embodiments of the present invention. The scope of the present invention is accordingly defined as set forth in the appended claims.

## CLAIMS

What is claimed is:

1. A cylinder for an implant system comprising:  
5 a substantially cylindrical body; and  
one or more shelves disposed on a surface of the substantially cylindrical body.
2. The cylinder of claim 1 wherein the one or more shelves comprise one or  
more horizontally extending shelves, one or more vertically extending shelves, or a  
10 combination thereof.
3. The cylinder of claim 2 wherein the horizontally extending shelves are  
located on facial and lingual surfaces of the body and the vertically extending shelves are  
located on proximal surfaces of the body.  
15
4. The cylinder of claim 1 further comprising an opening extending axially  
through the body.
5. A framework for an implant system comprising:  
20 one or more cylinders, wherein the cylinders each comprise a substantially  
cylindrical body and one or more shelves disposed on a surface of the substantially  
cylindrical body; and  
fiber reinforced composite material retained on the cylinders.
- 25 6. The framework of claim 5 wherein the one or more shelves comprise one  
or more horizontally extending shelves, one or more vertically extending shelves, or a  
combination thereof.
7. The framework of claim 5 wherein the one or more cylinders comprise a  
30 series of cylinders aligned in a curved line.

8. The framework of claim 5 wherein the fiber reinforced composite material is disposed in and between the vertically extending shelves.

9. The framework of claim 5 wherein the fiber reinforced composite material  
5 is in the shape of bars.

10. The framework of claim 5 wherein the fiber reinforced composite material is wrapped around the one or more cylinders.

10 11. The framework of claim 6 wherein the fiber reinforced composite material is disposed in and between the vertically extending shelves and is wrapped around the one or more cylinders.

12. An implant system comprising:  
15 one or more cylinders comprising a substantially cylindrical body and one or more shelves disposed on a surface of the substantially cylindrical body.

13. An implant system comprising:  
one or more abutments for connection to implants;  
20 one or more cylinders for connection to the one or more abutments wherein each cylinder comprises a substantially cylindrical body, one or more horizontally extending shelves disposed on the surface of the body, and one or more vertically extending shelves disposed on the surface of the body; and  
fiber reinforced composite material retained on the cylinders.

25

14. The implant system of claim 13 further comprising implants.

15. The implant system of claim 13 wherein the fiber reinforced composite material is disposed in and between the vertically extending shelves and is wrapped  
30 around the one or more cylinders.

16. An implant system comprising:  
one or more abutments for connection to implants;  
one or more cylinders for connection to the abutments wherein each cylinder  
comprises a substantially cylindrical body, one or more horizontally extending shelves  
5 disposed on the surface of the body, and one or more vertically extending shelves  
disposed on the surface of the body; and  
a structural material disposed on the cylinders.
17. The implant system of claim 16 further comprising implants.
18. The implant system of claim 16 wherein the structural material comprises  
fiber-reinforced composite material.
19. The cylinder of claim 1 fabricated of a material selected from plastic,  
15 ceramic, polymeric material, and mixtures thereof.
20. The framework of claim 5 wherein the fiber reinforced composite  
material comprises a polymeric matrix and fibers dispersed in the polymeric matrix.
21. The framework of claim 20 wherein the fiber-reinforced composite  
material further comprises a filler material.
22. The framework of claim 20 wherein the polymeric matrix is selected from  
the group of polyamides, polyesters, polyolefins, polyimides, polyacrylates,  
25 polyurethanes, vinyl esters, nylon, epoxy-based materials, styrene, styrene acrylonitrile,  
ABS polymers, polysulfones, polyacetals, polycarbonates, polyphenylene sulfides and  
mixtures thereof.
23. The framework of claim 20 wherein the fibers are fabricated from  
30 materials selected from glass, carbon, graphite, polyaramid, polyethylene and mixtures  
thereof.



24. The framework of claim 21 wherein the filler material is selected from silica, silicate glass, quartz, barium silicate, strontium silicate, barium borosilicate, strontium borosilicate, borosilicate, lithium silicate, amorphous silica, ammoniated or  
5 deammoniated calcium phosphate, alumina, zirconia, tin oxide, titania poly(methacrylate) and mixtures thereof.

25. A prosthesis comprising the implant system of claim 13.

10 26. A prosthesis comprising the implant system of claim 16.

27. A method of making an implant system comprising:  
placing a series of cylinders onto a cast wherein each cylinder comprises a substantially cylindrical body, one or more horizontally extending shelves disposed on  
15 the surface of the body, and one or more vertically extending shelves disposed on the surface of the body; and  
building a structural framework on the series of cylinders.

28. The method of claim 27 wherein the structural framework comprises fiber  
20 reinforced composite material.

29. The method of claim 27 further comprising building a prosthesis on the framework.

25 30. The method of claim 29 further comprising inserting the implant system into a patient's mouth.

31. An implant system comprising:  
one or more abutments for connection to implants;

one or more cylinders for connection to the one or more abutments wherein each cylinder comprises a substantially cylindrical body and one or more shelves disposed on a surface of the substantially cylindrical body; and

fiber reinforced composite material retained on the cylinders.

5

32. An implant system comprising:

one or more abutments for connection to implants;

one or more cylinders for connection to the abutments wherein each cylinder comprises a substantially cylindrical body and one or more shelves disposed on a surface of the substantially cylindrical body; and

10

a structural material disposed on the cylinders.

33. An abutment for an implant system comprising:

a longitudinally extending upper end;

15

a collar connected to the upper end; and

a longitudinally extending lower end connected to the collar, wherein the upper end comprises one or more retaining holes.

34. The abutment of claim 33 wherein the lower end comprises threading.

20

35. An implant system comprising one or more abutments of claim 33.

36. The implant system of claim 35 wherein polymeric material is disposed on the upper end of the abutment.

25

37. The implant system of claim 36 wherein a crown is disposed on the polymeric material.

38. An abutment for an implant system comprising:

30

a substantially cylindrical lower end; and

a substantially cylindrical upper end having a plurality of beads thereon.

39. The abutment of claim 38 comprising a bore therethrough.

40. An implant system comprising one or more abutments of claim 38.

5

41. The implant system of claim 40 wherein polymeric material is disposed on the upper end of the abutment.

42. The implant system of claim 36 wherein a crown is disposed on the  
10 polymeric material.

43. A cylinder for an implant system comprising:  
a substantially cylindrical body;  
one or more shelves disposed on a surface of the substantially cylindrical body;  
15 and  
a cantilever extending from the cylindrical body.

44. A cylinder for an implant system comprising:  
a substantially cylindrical body;  
20 one or more shelves disposed on a surface of the substantially cylindrical body;  
and  
a series of nodules, holes or beads disposed on a surface of the cylindrical body.

45. A kit for an implant system comprising:  
25 one or more cylinders, wherein the cylinders comprise a substantially cylindrical body; and one or more shelves disposed on a surface of the substantially cylindrical body.

46. A kit for an implant system comprising:  
composite material; and  
30 one or more cylinders, wherein the cylinders comprise a substantially cylindrical body; and one or more shelves disposed on a surface of the substantially cylindrical body.

47. The kit of claim 45 further including abutments, implants, and composite material.

5 48. The kit of claim 47 further including bonding resin and screws.

10

15

20

25

30

## Abstract

An implant system may comprise implants, abutments, cylinders and a structural framework with a veneer thereon. A prosthesis comprises the structural framework and veneer. The cylinders are provided with grooves or shelves thereon to retain a structural framework thereon. The structural framework may comprise fiber reinforced composite material which is disposed on and around the cylinders to provide the framework for a prosthesis.

Abutments are provided for single or small implant systems wherein the abutments comprise mechanical retentive features such as grooves, holes, nodules or beads thereon for retaining polymeric material thereon.

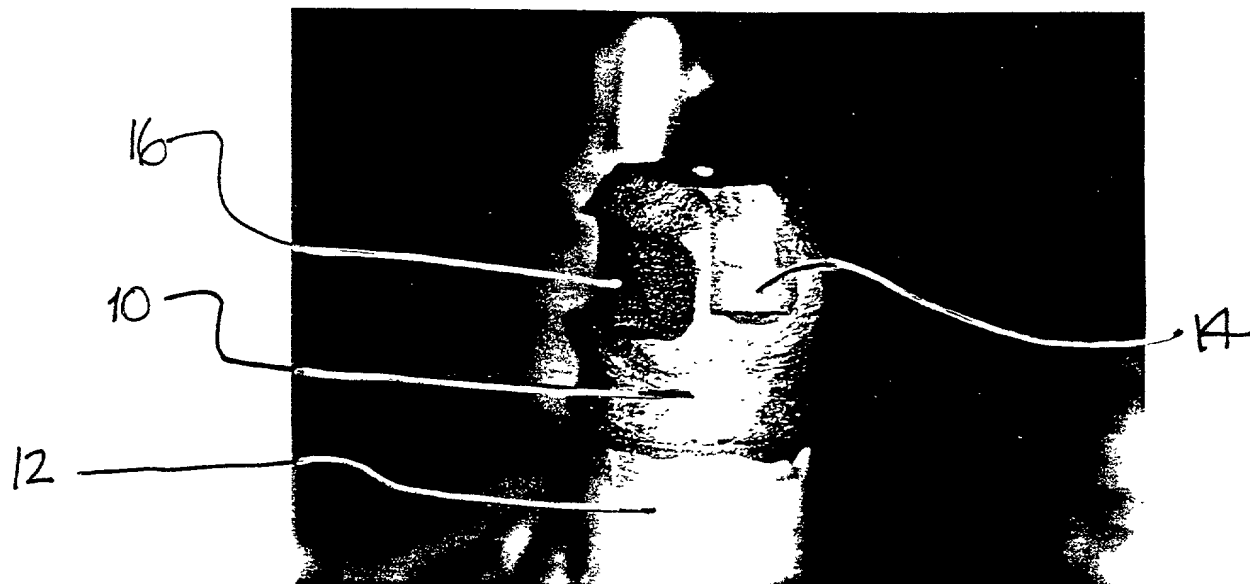


FIGURE 1

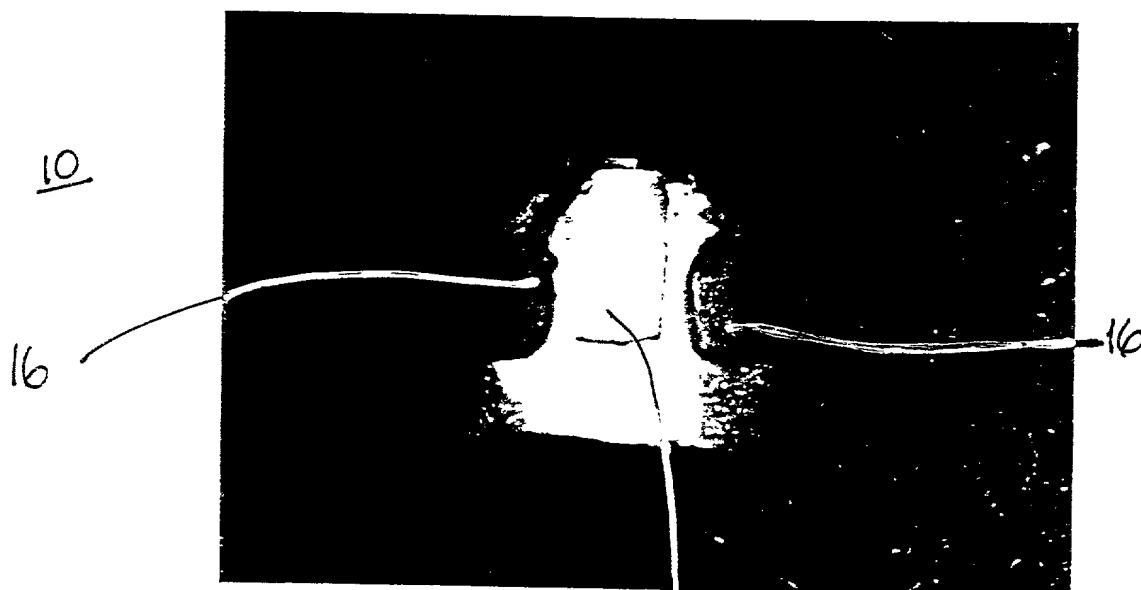


FIGURE 2

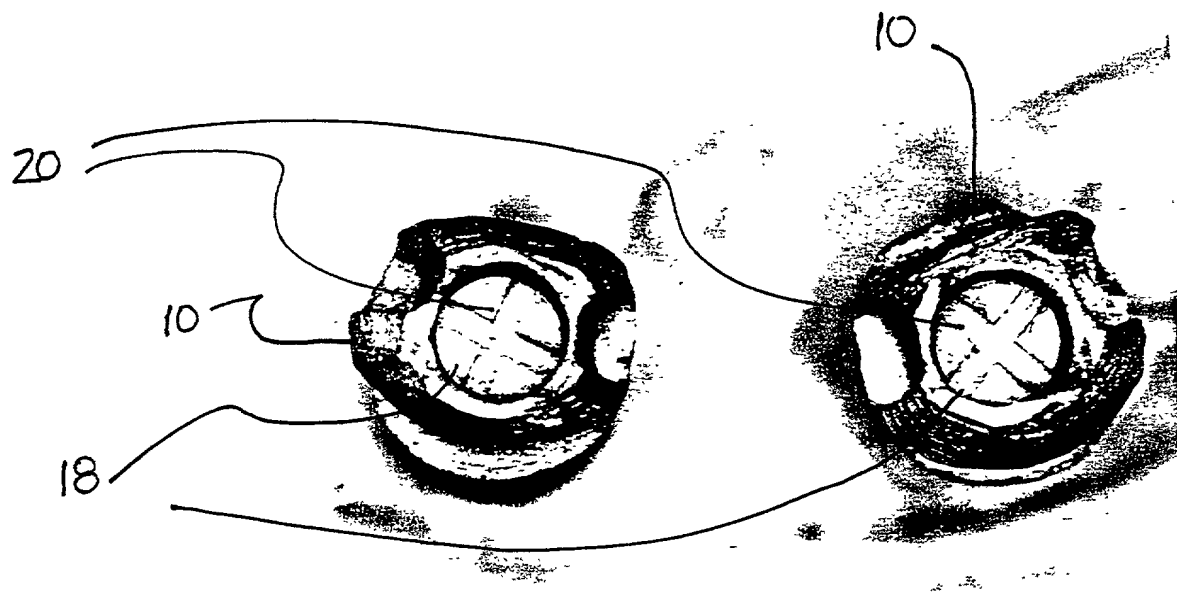


FIGURE 3

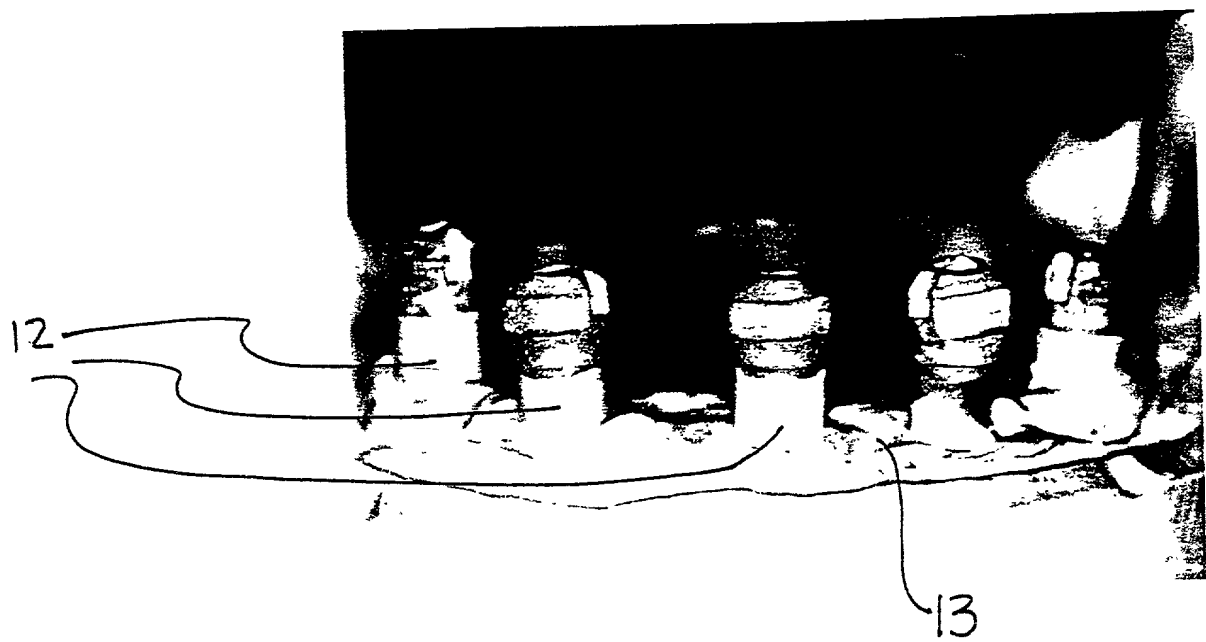


FIGURE 4

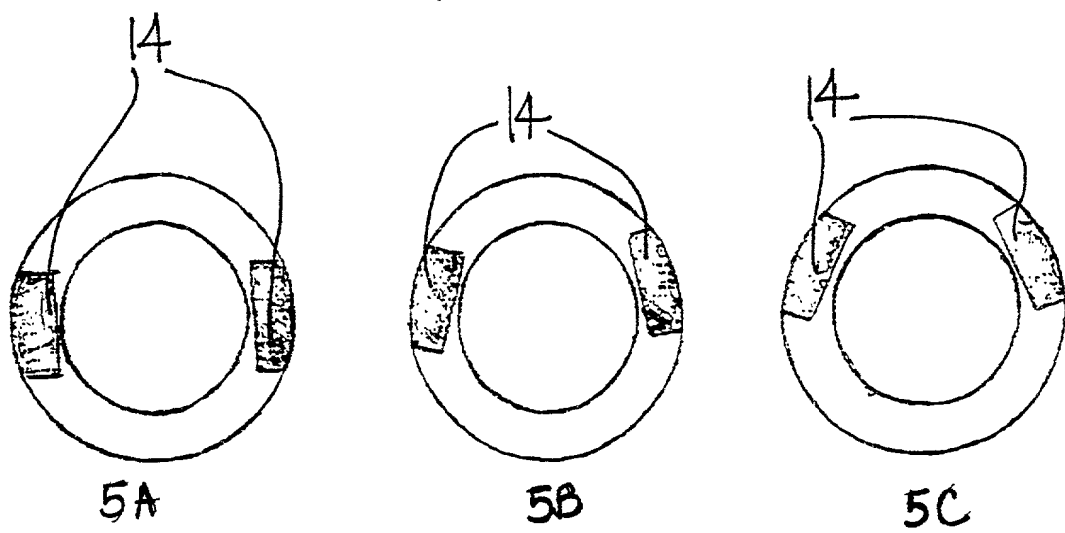
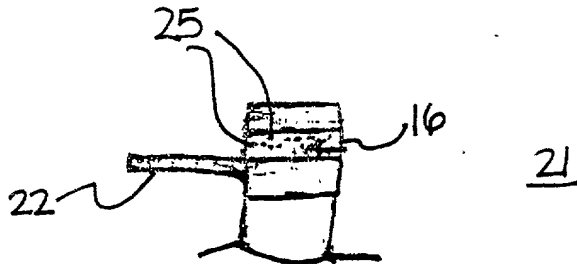
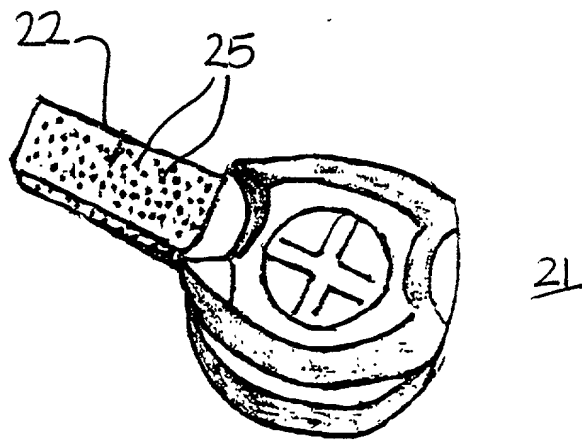


FIGURE 5





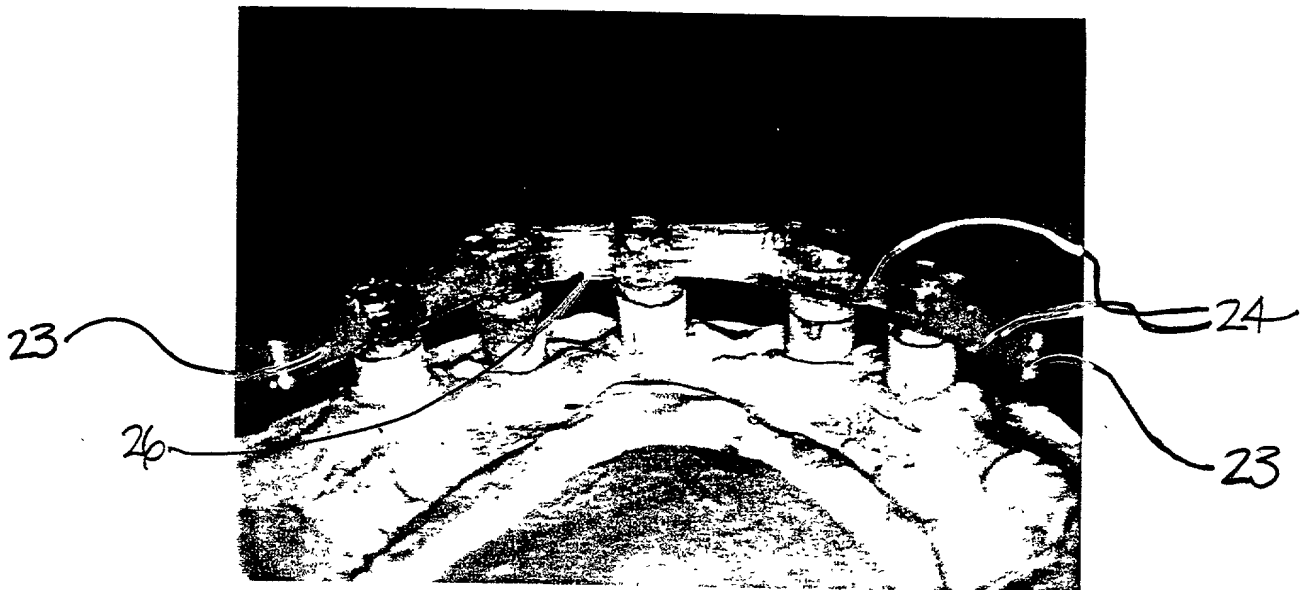


FIGURE 8

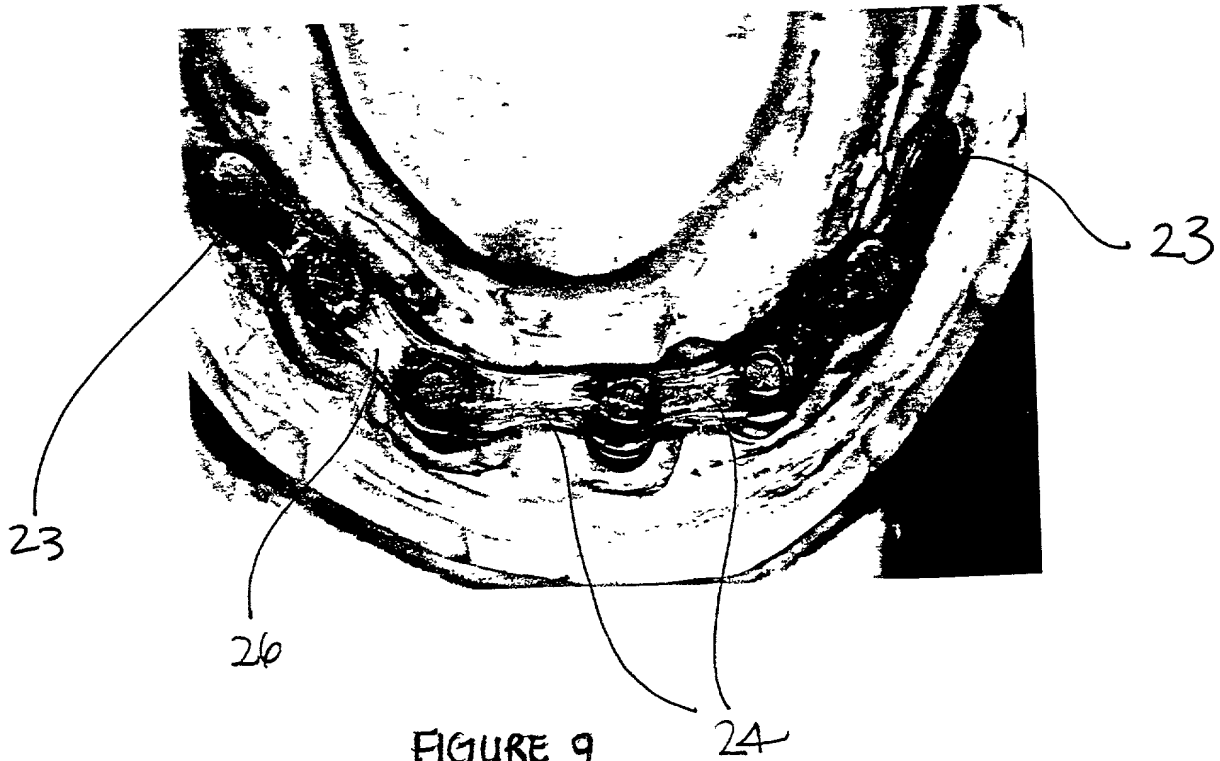


FIGURE 9

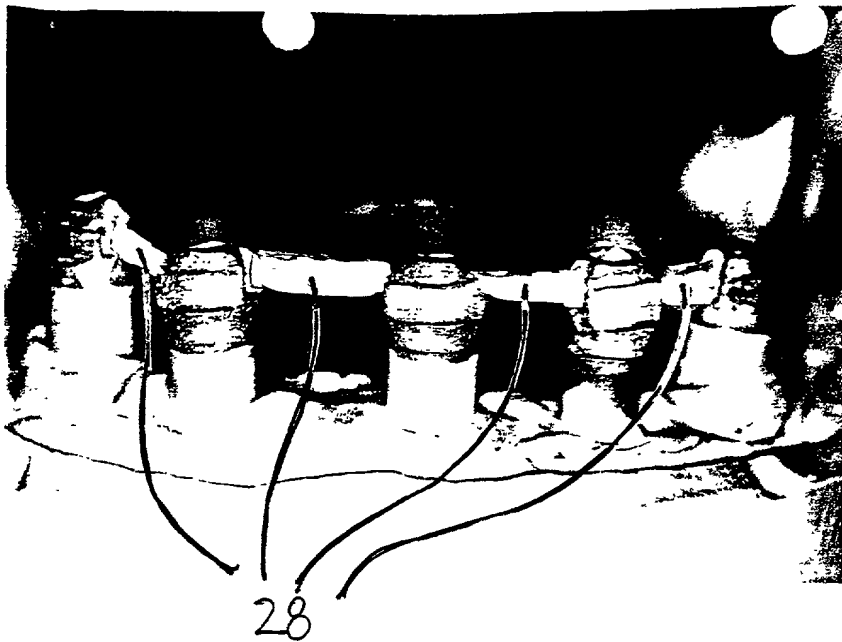


FIGURE 10.

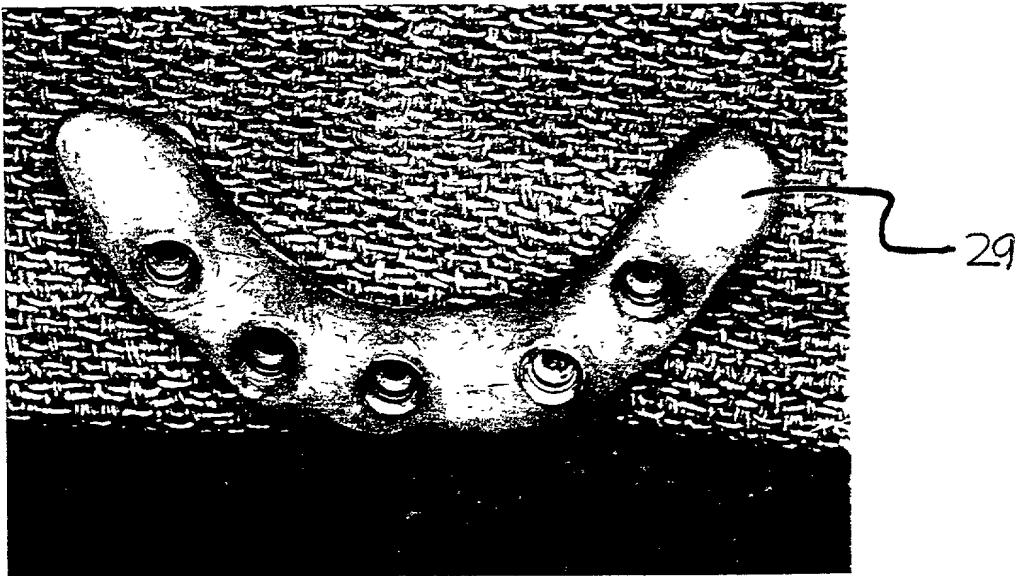


FIGURE 11

0931464-031399



FIGURE 12

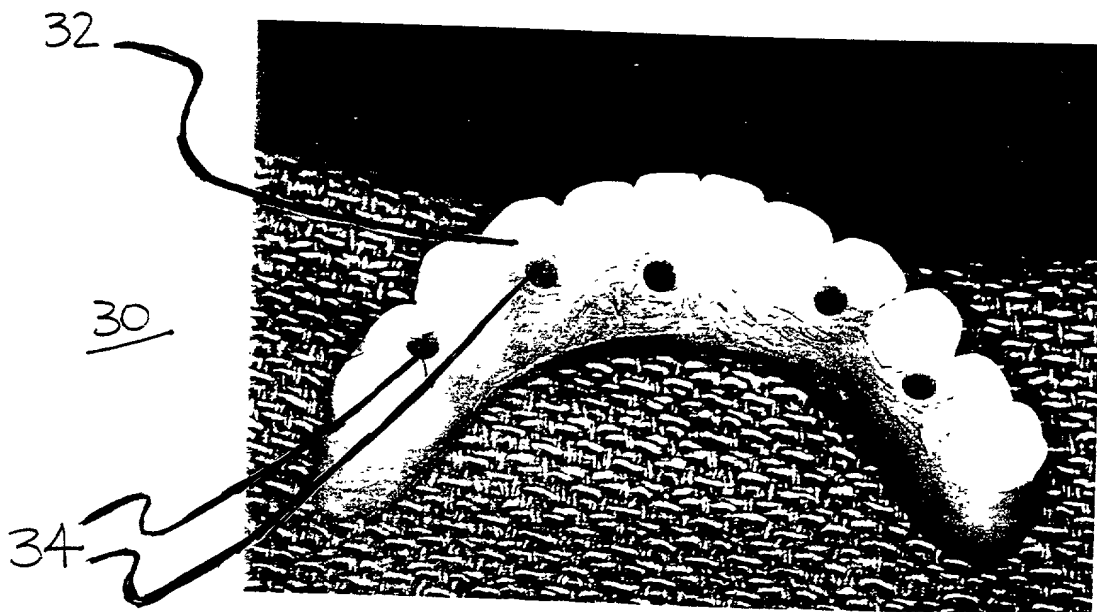


FIGURE 13

0931464-051399

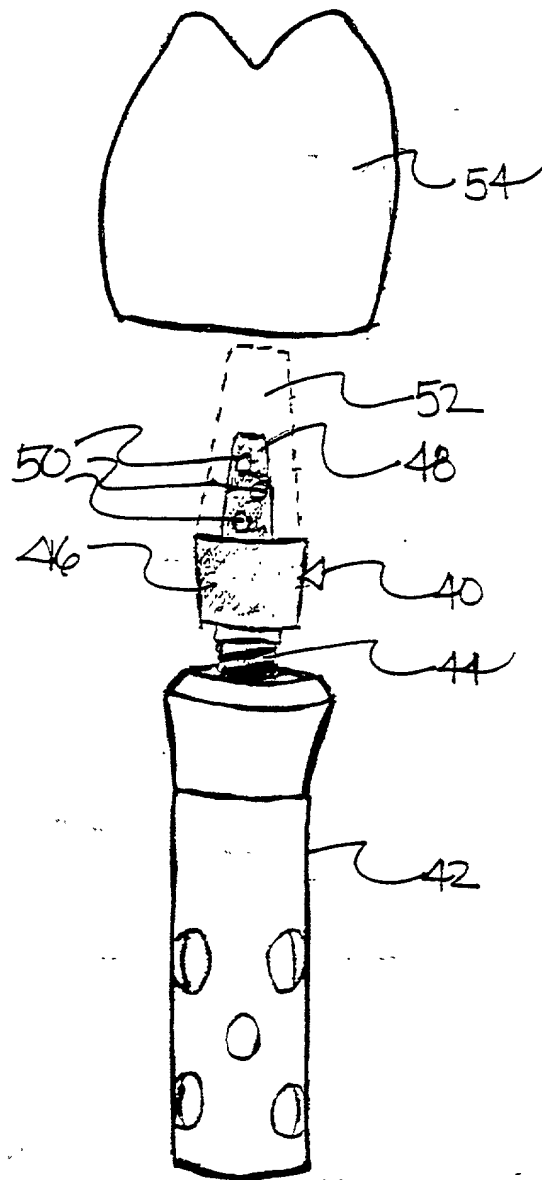


FIGURE 14

0931464-054399

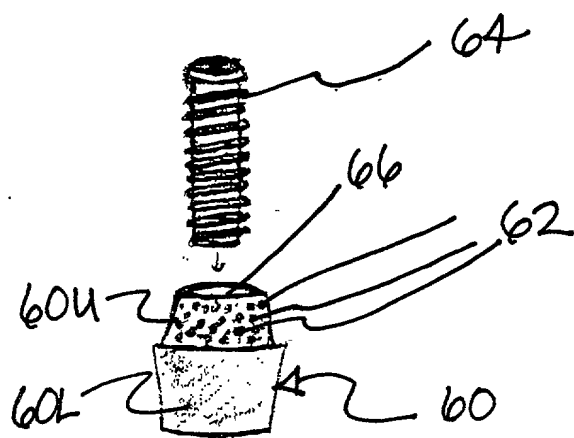


FIGURE 15